



AUTOMATIC LEVELLING  
OUTRIGGERS



NON-MARKING TYRES

STANDARD EQUIPMENT

- Proportional controls
- Self-closing gate on platform
- Drivable at full height
- Foam filled tyres
- 4WD
- Automatic brake system
- Swing-out engine tray
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Anti-restart engine protection
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Folding handrails
- Extended platform
- European iii emission engine
- Flashing beacon
- Hydraulic oil cooler
- Overload sensor with alarm
- Automatic levelling hydraulic outriggers
- AC power to platform

OPTIONS

- Platform work lights
- Airline to platform
- Hydraulic generator
- Non-marking tyres

# Summit SC

DIESEL SELF-PROPELLED  
ROUGH TERRAIN SCISSOR LIFTS



WATERPROOF



SAFETY BAR




FOLDING  
HANDRAILS









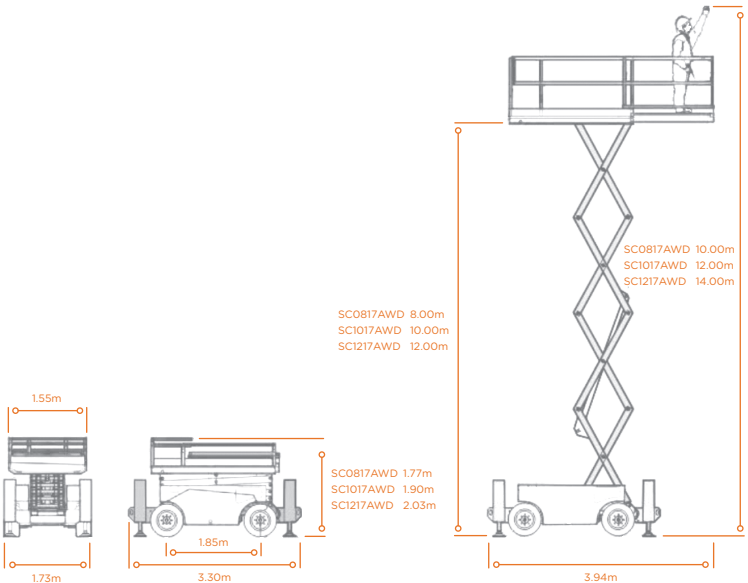


BRAKE RELEASE  
VALVE



GRADEABILITY



	SC0817AWD	SC1017AWD	SC1217AWD
 S.W.L S.W.L ON EXTENSION MAX. OCCUPANTS (INDOOR/OUTDOOR)	567kg 136kg 4/4	454kg 113kg 4/2	345kg 113kg 3/2
 WORKING HEIGHT PLATFORM FLOOR HEIGHT	10.00m 8.00m	12.00m 10.00m	14.00m 12.00m
 OVERALL LENGTH (WITH/WITHOUT OUTRIGGERS) OVERALL WIDTH OVERALL HEIGHT (STANDARD/FOLDED HANDRAILS) PLATFORM SIZE PLATFORM EXTENSION SIZE GROUND CLEARANCE WHEELBASE TURNING RADIUS (INSIDE/OUTSIDE)	3.30m/2.67m 1.73m 2.37m/1.77m 2.51x1.55m 1.43m 0.19m 1.85m 2.00m/3.90m	3.30m/2.67m 1.73m 2.50m/1.90m 2.51x1.55m 1.43m 0.19m 1.85m 2.00m/3.90m	3.30m/2.67m 1.73m 2.63m/2.03m 2.51x1.55m 1.43m 0.19m 1.85m 2.00m/3.90m
 ENGINE	Kubota D1105 18.6kW/2600rpm		
 TRAVEL SPEED Stowed Raised Up/Down speed Wind rated	6.1km/h 1.1km/h 41/48sec 12.5m/s	6.1km/h 1.1km/h 40/37sec 12.5m/s	6.1km/h 1.1km/h 50/40sec 12.5m/s
 GRADEABILITY MAXIMUM WORKING SLOPE	35% 2°/3°	30% 2°/3°	30% 2°/3°
 HYDRAULIC TANK DIESEL TANK	62L 55L	62L 55L	62L 55L
 TYRES	26x12-16.5	26x12-16.5	26x12-16.5
 WEIGHT (WITH/WITHOUT OUTRIGGERS)	3630kg/3280kg	3850kg/3500kg	4050kg/3700kg