



AUTOMATIC LEVELLING
OUTRIGGERS




NON MARKING TYRE

STANDARD EQUIPMENT

- Proportional controls
- Self-closing gate on platform
- Solid tyres
- 4WD
- Automatic brake system
- Slide-out engine tray
- Safety electric pump
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Anti-restart engine protection
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Folding handrails
- Dual extended platforms
- European iii emission engine
- Flashing beacon
- Hydraulic oil cooler
- Overload sensor with alarm
- Automatic levelling hydraulic

OPTIONS

- Hydraulic generator
- Hydraulic welder
- Hydraulic compressor
- Hydraulic water pump
- Platform work lights
- Non-marking tyres

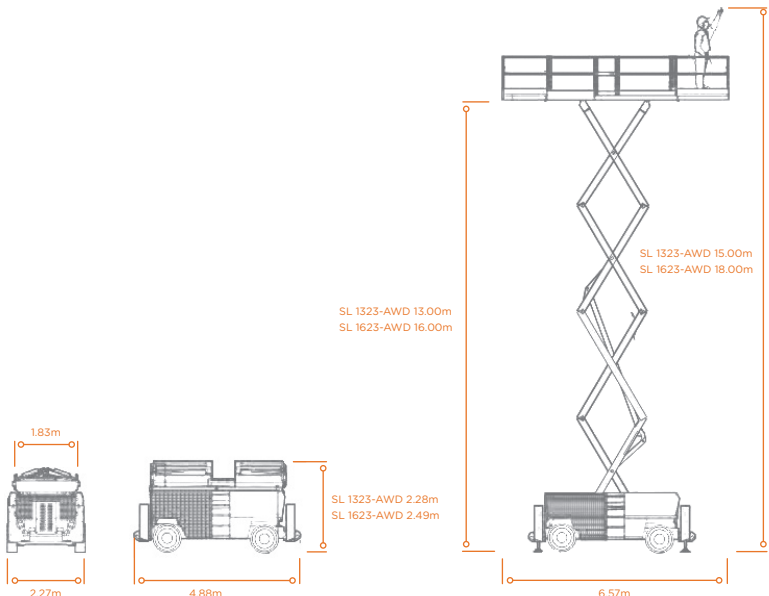

Summit SL

DIESEL SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFTS



WATERPROOF



EXTENDED
PLATFORM



FOLDING
HANDRAILS



SLIDE-OUT
BATTERY



GRADEABILITY



S.W.L
S.W.L ON EXTENSION
MAX. OCCUPANTS



WORKING HEIGHT
PLATFORM FLOOR HEIGHT



OVERALL LENGTH (WITH/WITHOUT OUTRIGGERS)
OVERALL WIDTH
OVERALL HEIGHT (STANDARD/FOLDED HANDRAILS)
PLATFORM SIZE
PLATFORM EXTENSION SIZE
GROUND CLEARANCE
WHEELBASE
TURNING RADIUS (INSIDE/OUTSIDE)



ENGINE
Deutz D2011L031



TRAVEL SPEED
Stowed
Raised
Up/Down speed
Wind rated



GRADEABILITY
MAXIMUM WORKING SLOPE



HYDRAULIC TANK
DIESEL TANK



TYRES



WEIGHT (WITH/WITHOUT OUTRIGGERS)

SL1323-AWD

680kg
227kg
7
15.00m
13.00m
4.88m/3.98m
2.27m
2.98m/2.28m
3.98mx1.83m
6.57mx1.83m
0.22m
2.86m
2.35m/5.20m
36.3kW/280rpm
6.1km/h
1.1km/h
70/52sec
12.5m/s
50%
2°/3°
130L
100L
33x12-20
8200kg/7680kg

SL1623-AWD

680kg
227kg
6
18.00m
16.00m
4.88m/3.98m
2.27m
3.19m/2.49m
3.98mx1.83m
6.57mx1.83m
0.22m
2.86m
2.35m/5.20m
36.3kW/280rpm
6.1km/h
1.1km/h
123/74sec
12.5m/s
40%
2°/3°
130L
100L
33x12-20
9190kg/8670kg