



COMPACT



GRADEABILITY

STANDARD EQUIPMENT

Standard Equipment
Proportional controls
Automatic pothole protection
Self-closing gate on platform
Drivable at full height
Non-marking tyres
2WD
Automatic brake system
Emergency lowering system
Emergency stop button
Cylinder holding valve
Onboard diagnostic system
Tilt sensor with alarm
All motion alarm
Horn
Hour meter
Safety brackets
Forklift pockets
Folding handrails
Extended platform
Charger protection
Flashing beacon
Overload sensor with alarm
AC power to platform

OPTIONS

Platform work lights
Airline to platform

E-Tech

SELF-PROPELLED SCISSOR LIFTS (ELECTRIC DRIVE)



SWING OUT TRAYS



FOLDING
HANDRAILS




TIGHT TURNING
RADIUS









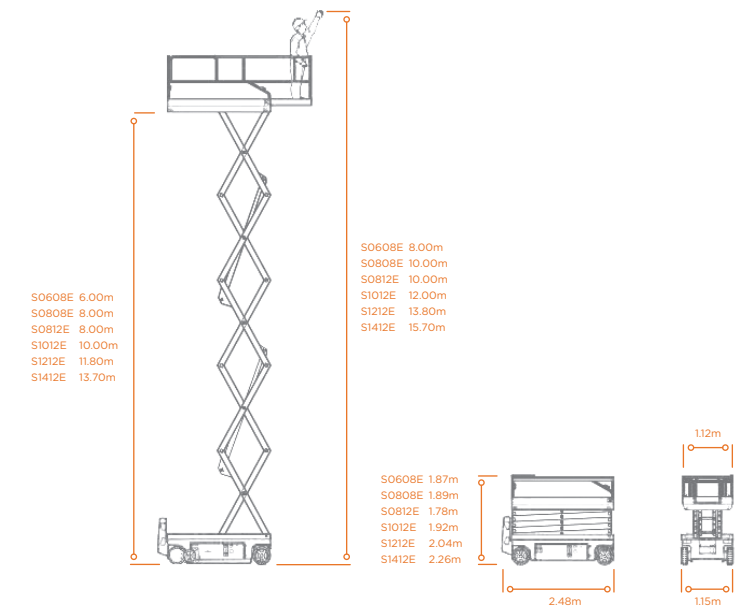






















WATERPROOF



WWW.LIFTX.CO.NZ



	S0608E	S0808E	S0812E	S1012E	S1212E	S1412E
 S.W.L	380kg	230kg	450kg	320kg	320kg	200kg
 S.W.L ON EXTENSION	113kg	113kg	113kg	113kg	113kg	113kg
 MAX. OCCUPANTS (INDOOR/OUTDOOR)	2/1	2/0	2/2	2/1	2/0	2/0
 WORKING HEIGHT	8.00m	10.00m	10.00m	12.00m	13.80m	15.70m
 PLATFORM FLOOR HEIGHT	6.00m	8.00m	8.00m	10.00m	11.80m	13.70m
 OVERALL LENGTH	2.48m	2.48m	2.48m	2.48m	2.48m	2.84m
 OVERALL WIDTH	0.81m	0.81m	1.15m	1.15m	1.15m	1.25m
 OVERALL HEIGHT (RAILS UP)	2.20m	2.32m	2.32m	2.44m	2.58m	2.58m
 OVERALL HEIGHT (RAILS DOWN)	1.87m	1.89m	1.78m	1.92m	2.04m	2.26m
 PLATFORM SIZE	2.27x0.81m	2.27x0.81m	2.27x1.12m	2.27x1.12m	2.27x1.12m	2.64x1.12m
 PLATFORM EXTENSION SIZE	0.90m	0.90m	0.90m	0.90m	0.90m	0.90m
 GROUND CLEARANCE (STOWED)	0.10m	0.10m	0.10m	0.10m	0.10m	0.10m
 GROUND CLEARANCE (RAISED)	0.019m	0.019m	0.019m	0.019m	0.019m	0.019m
 WHEELBASE	1.87m	1.87m	1.87m	1.87m	1.87m	2.22m
 TURNING RADIUS (INSIDE)	0m	0m	0m	0m	0m	0m
 TURNING RADIUS (OUTSIDE)	2.10m	2.10m	2.20m	2.20m	2.20m	2.65m
 DRIVE MOTORS	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW
 LIFTING MOTOR	24V/3.3kW	24V/3.3kW	24V/3.3kW	24V/4.5kW	24V/4.5kW	24V/4.5kW
 TRAVEL SPEED	4.0km/h	4.0km/h	4.0km/h	4.0km/h	4.0km/h	4.0km/h
 Stowed	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
 Raised	31/67sec	42/30sec	36/33sec	54/42sec	84/38sec	88/60sec
 Up/Down speed	12.5m/s	n/a	12.5m/s	12.5m/s	n/a	n/a
 Wind rated	4x6V/225Ah	4x6V/225Ah	4x6V/225Ah	4x6V/240Ah	4x12V/300Ah	4x12V/300Ah
 BATTERIES	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A
 INTEGRATED CHARGER	25%	25%	25%	25%	25%	25%
 GRADEABILITY	2°/3°	1.5°/3°	2°/3°	2°/3°	1.5°/3°	1.5°/3°
 MAXIMUM WORKING SLOPE	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm
 TYRES	2125kg	2180kg	2655kg	2965kg	2880kg	3150kg
 WEIGHT						