



Rizer

ELECTRIC ALUMINIUM WORK PLATFORM (SINGLE MAST)



SWING OUT OUTRIGGERS WITH INTERLOCK SYSTEM




TILT BACK FRAME

STANDARD EQUIPMENT

- Swing out outriggers with interlock system
- Emergency stop button
- Easy loading in pickup trucks
- Two control operation
- Emergency lowering system
- Levelling indicator
- Forklift pockets
- Transport tie hole
- Tilt back frame (only for MVP120E)
- All motion alarm
- Overload sensor
- Beacon

OPTIONS:

- AC power to platform

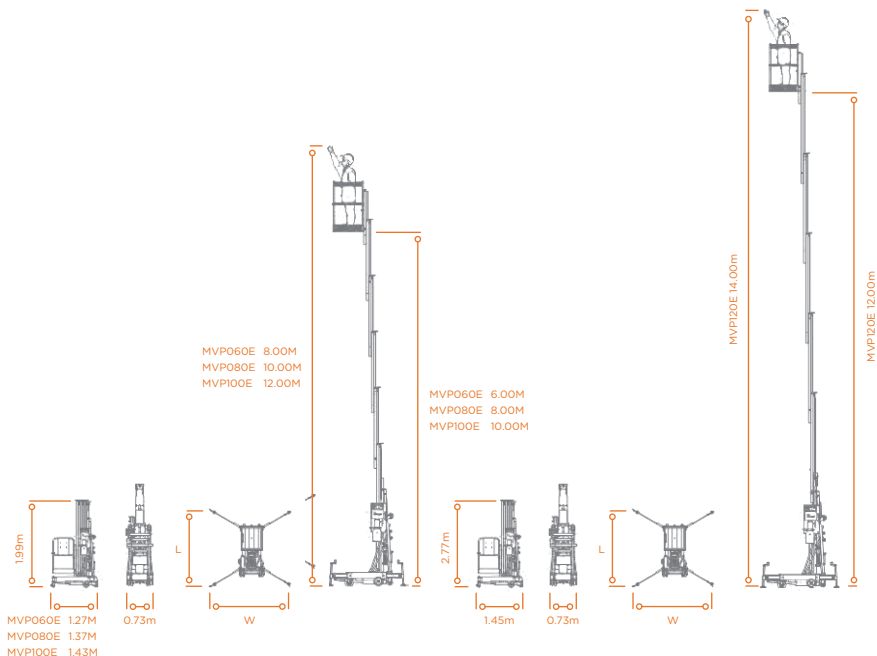

S.W.L.
MAX. OCCUPANTS

MVP060E

150kg
1

MVP080E

150kg
1

MVP100E

150kg
1

MVP120E

136kg
1



WORKING HEIGHT
PLATFORM FLOOR HEIGHT

8.00m
6.00m

10.00m
8.00m

12.00m
10.00m

14.00m
12.00m



OVERALL LENGTH (STOWED)
OVERALL LENGTH (TILTED BACK)

1.27m
n/a

1.37m
n/a

1.43m
n/a

1.45m
2.95m



OVERALL WIDTH
OVERALL HEIGHT (STOWED)

0.73m
1.99m

0.73m
1.99m

0.73m
1.99m

0.73m
2.77m



OVERALL HEIGHT (TILTED BACK)
OUTRIGGER FOOTPRINT (L/W)

n/a
1.64/1.88m

n/a
1.64/1.88m

n/a
1.64/1.88m

1.95m
1.92/2.16m



PLATFORM SIZE
GROUND CLEARANCE

0.69x0.60m
0.06m

0.69x0.60m
0.06m

0.69x0.60m
0.06m

0.69x0.60m
0.06m



UP/DOWN SPEED

38/34sec

41/32sec

48/32sec

62/46sec



LIFTING MOTOR
AC
DC

110-230VAC/1.5kW
12VDC/1.5kW

110-230VAC/1.5kW
12VDC/1.5kW

110-230VAC/1.5kW
12VDC/1.5kW

110-230VAC/1.5kW
12VDC/1.5kW



TYRES
Back wheels
Front wheels

8in
5in

8in
5in

8in
5in

8in
5in



WEIGHT

366(AC)/404(DC)kg

414(AC)/450(DC)kg

434(AC)/470(DC)kg

526(AC)/558(DC)kg



REMOVABLE BATTERY



TRANSPORT LOCK HOOK



ADJUSTABLE PICKUP RAIL



GROUND CONTROL WITH OUTRIGGER LEDS