




GRADEABILITY

STANDARD EQUIPMENT

- Proportional controls
- Automatic pothole protection
- Self-closing gate on platform
- Drivable at full height
- Non-marking tyres
- 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding handrails
- Extended platform
- Charger protection
- Flashing beacon
- Overload sensor with alarm
- AC power to platform

OPTIONS

- Platform work lights
- Airline to platform

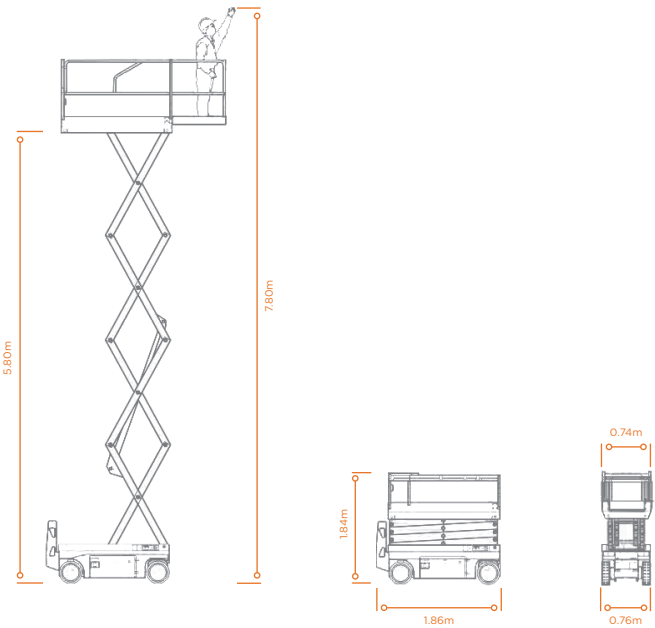

S06-E

	S.W.L	230kg
	S.W.L ON EXTENSION	113kg
	MAX. OCCUPANTS (INDOOR/OUTDOOR)	2/1
	WORKING HEIGHT	7.80m
	PLATFORM FLOOR HEIGHT	5.80m
	OVERALL LENGTH	1.86m
	OVERALL WIDTH	0.76m
	OVERALL HEIGHT (RAILS UP)	2.18m
	OVERALL HEIGHT (RAILS DOWN)	1.84m
	PLATFORM SIZE	1.67x0.74m
	PLATFORM EXTENSION SIZE	0.90m
	GROUND CLEARANCE (STOWED)	0.09m
	GROUND CLEARANCE (RAISED)	0.019m
	WHEELBASE	1.36m
	TURNING RADIUS (INSIDE)	0m
	TURNING RADIUS (OUTSIDE)	1.64m
	DRIVE MOTORS	24V/0.5kW
	LIFTING MOTOR	24V/2kW
	TRAVEL SPEED	
	Stowed	4.5km/h
	Raised	0.8km/h
	Up/Down speed	27/22sec
	Wind rated	12.5m/s
	BATTERIES	4x6V/210Ah
	INTEGRATED CHARGER	24V/25A
	GRADEABILITY	25%
	MAXIMUM WORKING SLOPE	1.5°/3°
	TYRES	Ø305x100mm
	WEIGHT	1415kg



SWING OUT TRAYS



FOLDING
HANDRAILS



WATERPROOF



TIGHT TURNING
RADIUS
RAM STEERING

E-Tech

SELF-PROPELLED SCISSOR LIFT (ELECTRIC DRIVE)