

STANDARD EQUIPMENT

- Auto locking brake system in raised position
- Battery charge indicator
- Self-closing gate on platform
- Tilt sensor cut-out system
- Safety brackets
- Emergency stop button
- Emergency lowering system
- Dual locking castors
- Forklift pockets
- Overload sensor with alarm

OPTIONS:

- All motion alarm
- Flashing beacon
- AC power to platform

Rizer

MOBILE SCISSOR LIFTS



SLIDE OUT TRAY




FOOT BRAKES



FORKLIFT POCKETS



COMPACT SIZE

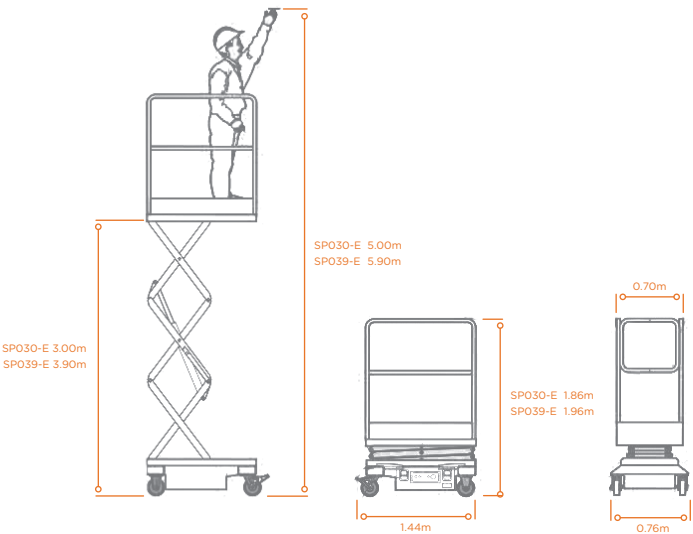

S.W.L.
MAX. OCCUPANTS



WORKING HEIGHT
PLATFORM FLOOR HEIGHT



OVERALL LENGTH
OVERALL WIDTH
OVERALL HEIGHT
PLATFORM SIZE
GROUND CLEARANCE
WHEELBASE



LIFTING MOTOR



UP/DOWN SPEED



BATTERIES
INTEGRATED CHARGER



TYRES



WEIGHT

SP030-E

240kg
1
5.00m
3.00m
1.44m
0.76m
1.86m
1.28x0.70m
0.06m
1.14m
12VDC/0.8kW
34/20sec
12V/85Ah
12V/15A
6in
520kg

SP039-E

240kg
1
5.90m
3.90m
1.44m
0.76m
1.96m
1.28x0.70m
0.06m
1.14m
12VDC/0.8kW
34/21sec
12V/85Ah
12V/15A
6in
530kg