



Summit SL



DIESEL SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFTS


+SL1323-AWD
+SL1623-AWD

STANDARD FEATURES

- + Proportional controls
- + Self-closing gate on platform
- + Solid tyres
- + 4WD
- + Automatic brake system
- + Slide-out engine tray
- + Safety electric pump
- + Emergency stop button
- + Cylinder holding valve
- + Onboard diagnostic system
- + Tilt sensor with alarm
- + Anti-restart engine protection
- + All motion alarm
- + Horn
- + Hour meter
- + Safety brackets
- + Folding handrails
- + Dual extended platforms
- + European iii emission engine
- + Flashing beacon
- + Hydraulic oil cooler
- + Overload sensor with alarm
- + Automatic levelling hydraulic

OPTIONAL EXTRAS

- + 9kva hydraulic generator
- + Hydraulic welder
- + Hydraulic compressor
- + Hydraulic water pump
- + Platform work lights
- + Non-marking tyres

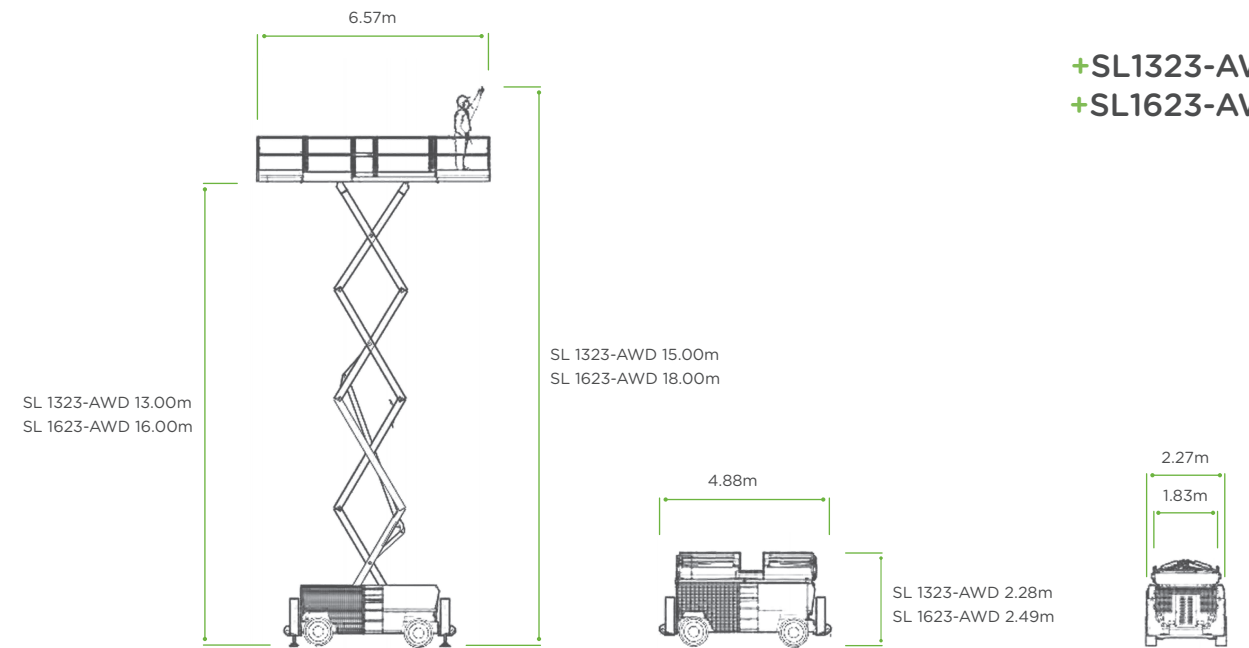

SL1323-AWD

SL1623-AWD

	S.W.L	680kg	680kg
	S.W.L ON EXTENSION	227kg	227kg
	MAX. OCCUPANTS	7	6
	WORKING HEIGHT	15.00m	18.00m
	PLATFORM FLOOR HEIGHT	13.00m	16.00m
	OVERALL LENGTH	4.88m	4.88m
	OVERALL LENGTH	3.98m	3.98m
	OVERALL WIDTH	2.27m	2.27m
	OVERALL HEIGHT - STANDARD	2.98m	3.19m
	OVERALL HEIGHT - FOLDED HANDRAILS	2.28m	2.49m
	PLATFORM SIZE	3.98mx1.83m	3.98mx1.83m
	PLATFORM EXTENSION SIZE	6.57mx1.83m	6.57mx1.83m
	GROUND CLEARANCE	0.22m	0.22m
	WHEELBASE	2.29m	2.29m
	TURNING RADIUS - INSIDE	2.35m	2.35m
	TURNING RADIUS - OUTSIDE	5.20m	5.20m
	GRADEABILITY	50%	40%
	MAXIMUM WORKING SLOPE	2°/3°	2°/3°
	STOWED SPEED	6.1km/h	6.1km/h
	RAISED SPEED	1.1km/h	1.1km/h
	UP/DOWN SPEED	70/52sec	123/74sec
	WIND RATED SPEED	12.5m/s	12.5m/s
	ENGINE - DEUTZ D2011L031	36.3kW/280rpm	36.3kW/280rpm
	HYDRAULIC TANK	130L	130L
	DIESEL TANK	100L	100L
	TYRES	33x12-20	33x12-20
	WEIGHT	8200kg	9190kg

