

Rizer



MOBILE SCISSOR LIFTS (PUSH AROUND)

STANDARD FEATURES

- + Auto locking brake system in raised position
- + Battery charge indicator
- + Self-closing gate on platform
- + Tilt sensor cut-out system
- + Safety brackets
- + Emergency stop button
- + Emergency lowering system
- + Dual locking castors
- + Forklift pockets
- + Overload sensor with alarm

OPTIONAL EXTRAS

- + All motion alarm
- + Flashing beacon
- + AC power to platform












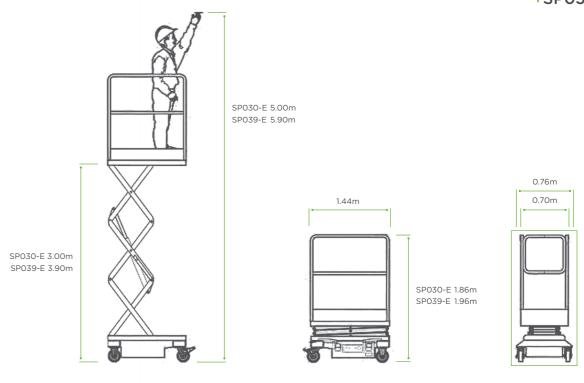

		SP030-E	SP039-E
	S.W.L MAX. OCCUPANTS	240kg 1	240kg 1
1	WORKING HEIGHT PLATFORM FLOOR HEIGHT	5.00m 3.00m	5.90m 3.90m
 	OVERALL LENGTH OVERALL WIDTH OVERALL HEIGHT PLATFORM SIZE	1.44m 0.76m 1.86m 1.28x0.70m	1.44m 0.76m 1.96m 1.28x0.70m
	GROUND CLEARANCE WHEELBASE	0.06m 1.14m	0.06m 1.14m
= ○	UP/DOWN SPEED LIFTING MOTOR	34/20sec 12VDC/0.8kW	34/21sec 12VDC/0.8kW
-	BATTERIES INTEGRATED CHARGER	2x12V/85Ah 12V/15A	12V/85Ah 12V/15A
	TYRES	6in 520kg	6in 530kg

LIFTX.CO.NZ