

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

PULSEO
GENERATION

HS15 E PRO HS18 E PRO



HIGH PERFORMANCE & ROUGH TERRAIN CAPACITIES

- > Platform capacity of 750 kg
- > Oscillating axle delivers excellent ground adherence
- > Drive axle with manual locking rear differential increases ground traction

FULL ELECTRIC DRIVE

- > Silent & clean operations
- > Versatile use: outdoor / indoor
- > Smooth & proportional movements

MAINTENANCE AND SERVICE-ORIENTED

- > Activ'Screen: on-board configuration & diagnostic interface
- > Easy access to components
- > Activ'Energy Management takes care of your battery

EXTENDED DUTY CYCLES

- > Multiple charging modes including optional accelerated charge
- > Optional & removable, low fuel consumption Range Extender


HS15 E PRO HS18 E PRO

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

TECHNICAL DATA

	HS15 E PRO	HS18 E PRO
Working height	15 m	18 m
Platform height	13 m	16 m
Max. drive working height	15 m	13 m
Lift capacity	750 kg (4 pers.)	
Lift capacity on the extension deck	225 kg	
A Platform length - outside	3.93 m	
Platform length - extended	5.89 m	
B XL platform length (option)	4.94 m	
XL platform length - extended (option)	7.5 m	
Length - extension	0.98 m	
Length - extension XL option	1.28 m	
C Platform width - outside	1.89 m	
D Height - stowed	3.05 m	3.15 m
Guardrails lowered	2.25 m	2.36 m
E Overall width	2.3 m	
F Length	4.4 m	
G Wheelbase	2.76 m	
H Ground clearance	30.7 cm	
Drive speed	5 km/h	
Gradeability	45 %	40 %
Tilt (lonitudinal / lateral)	5° / 3°	5° / 2°
Turning radius - outside	6.75 m	
Tyres	830 x 285 mm	
Batteries	8 x 6 V - 435 Ah (C20)	
Weight	7 518 kg	8 048 kg

Certain options increase the machine weight

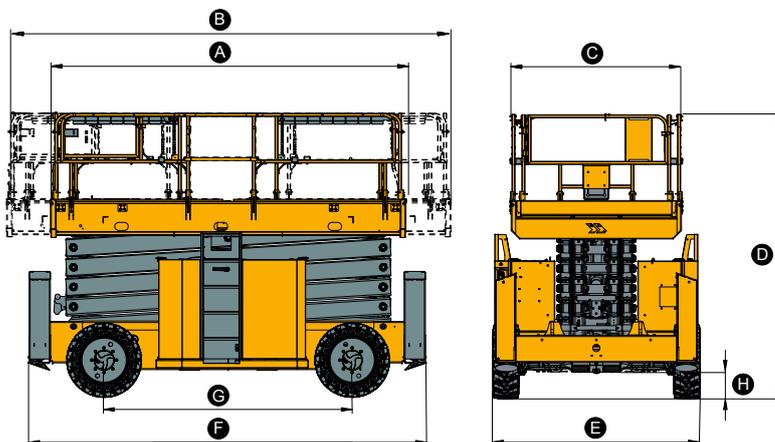

STANDARD EQUIPMENT

- > Front oscillating axle - 6°
- > 4 wheel drive
- > Mechanical axle with manual locking rear differential
- > Outriggers with centralised or individual controls
- > Dual platform extensions
- > Two swing gate entries
- > Folding handrails
- > Haulotte Activ'Energy Management: smart battery management system & manual centralised watering
- > AC motors
- > 48V battery pack
- > Haulotte Activ'Screen
- > Haulotte Activ'Lighting System for safe loading in conditions of low visibility

OPTIONS AND ACCESSORIES

- > Haulotte Activ'Shield Bar
- > Range Extender (5.5 kW) (standard in AUS / NZ)
- > Cold & arctic weather kits
- > Non marking tyres (standard in AU / NZ)
- > Material handling rack
- > AC power to platform plug (110 / 230 V)
- > Double drop bar entries
- > XL platform with dual extensions (7.5 m)
- > Platform lighting
- > Work light
- > Automatic battery water-filling system
- > Accelerated charger (380 V) (standard in AUS / NZ)
- > Scissors stack protection
- > Telematics holder & predisposition
- > Telematics solutions

